
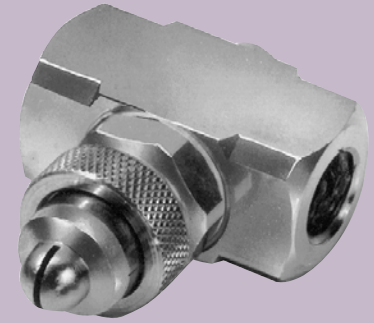


XAPF

Pressure-fed/Internal Mix/Flat Fan

DESIGN/SPRAY CHARACTERISTICS

- Internal mix
- Flat fan, wide angle spray patterns (between 80° and 90°)
- Finest atomization

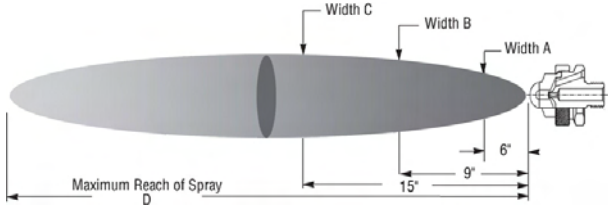

1/4" XA PF300 A
XA 00 Body; A Hardware

Dimensions are approximate. Check with BETE for critical dimension applications.

XA PF Set-up Flow Rates and Dimensions

Pressure-fed, Internal Mix, Round Spray Pattern, 1/8" and 1/4" Pipe Sizes, BSP or NPT

Pipe Size	Spray Set-up Number	Fluid and Air Cap Numbers	10 PSI Liquid			20 PSI Liquid			30 PSI Liquid			40 PSI Liquid			60 PSI Liquid			Spray Dimensions					
			PSI air	GPH	SCFM	PSI air	GPH	SCFM	PSI air	GPH	SCFM	PSI air	GPH	SCFM	PSI air	GPH	SCFM	PSI air	liquid	A (in.)	B (in.)	C (in.)	D (feet)
1/8 OR 1/4	PF 050	Fluid Cap FC4 & Air Cap AC1301	10	1.4	0.8	18	2.2	1.5	28	2.5	1.5	38	2.8	1.8	55	3.4	2.4	16	10	10	14	18	8
			12	1.3	1.0	22	1.8	1.6	32	2.2	1.6	42	2.5	2.0	65	2.8	2.9	30	20	14	20	26	9
			14	1.1	1.1	26	1.5	1.8	36	1.9	1.8	46	2.2	2.2	75	2.3	3.3	40	30	14	20	30	10
			16	0.9	1.2	30	1.2	2.0	40	1.6	2.0	50	1.9	2.4	85	1.7	3.7	50	40	18	24	34	11
			18	0.8	1.3	34	0.9	2.2	44	1.3	2.2	60	1.3	2.8	90	1.4	3.9	85	60	22	28	36	13
			22	0.5	1.6	40	0.6	2.7	55	0.7	2.7	70	0.7	3.3	100	0.9	4.3						
	PF 100	Fluid Cap FC3 & Air Cap AC1303	20	0.8	1.2	34	1.1	1.6	44	1.8	1.9	60	1.6	2.4	80	2.7	2.9	22	10	10	14	18	6
			22	0.6	1.3	36	0.9	1.7	46	1.6	1.9	65	1.2	2.6	85	2.2	3.1	38	20	14	20	28	6
			24	0.5	1.4	38	0.7	1.8	48	1.4	2.0	70	0.8	2.9	90	1.8	3.4	46	30	23	28	36	7
			26	0.4	1.5	40	0.6	1.9	50	1.1	2.1							60	40	24	28	37	7
			28	0.3	1.6	42	0.5	2.0	55	0.7	2.4							80	60	25	30	38	8
			44	0.4	2.1																		
PF 150	Fluid Cap FC3 & Air Cap AC1301	12	2.2	0.7	20	3.4	1.0	30	4.0	1.3	38	4.7	1.5	65	4.8	2.4	16	10	14	18	28	7	
		14	1.8	0.8	24	2.7	1.1	34	3.4	1.5	42	4.1	1.7	70	4.2	2.6	30	20	16	24	32	8	
		16	1.5	1.0	28	2.1	1.3	38	2.9	1.6	46	3.6	1.9	75	3.6	2.9	40	30	20	26	32	8	
		18	1.1	1.1	30	1.8	1.5	42	2.3	1.9	50	3.1	2.1	80	3.1	3.1	42	30	20	26	35	8	
		20	0.8	1.2	32	1.4	1.6	46	1.7	2.1	60	1.8	2.6	85	2.5	3.4	50	40	22	28	38	9	
		34	1.2	1.7	48	1.4	2.2	65	1.2	2.8	90	2.0	3.6	100	2.0	4.7	80	60	23	30	38	10	
PF 200	Fluid Cap FC3 & Air Cap AC1302	14	2.4	0.9	22	3.2	1.1	34	3.4	1.6	40	4.4	1.8	60	5.0	2.5	20	10	4	5	7	10	
		16	2.1	1.1	26	2.8	1.4	38	2.9	1.9	44	3.8	2.0	65	4.4	2.7	30	20	5	6	8	12	
		18	1.7	1.1	30	2.1	1.6	42	2.3	2.1	48	3.3	2.2	70	3.9	3.0	34	20	5	6	7	9	
		20	1.4	1.3	34	1.5	1.9	46	1.8	2.4	54	2.6	2.6	75	3.4	3.3	46	30	5	7	9	13	
		24	0.8	1.5	38	1.2	2.1	50	1.4	2.6	60	1.9	3.0	80	3.0	3.6	54	40	6	9	11	14	
		28	0.5	1.8	42	0.7	2.4	60	0.6	3.2	70	1.1	3.5	90	2.3	4.1	75	60	8	10	12	16	
PF 250	Fluid Cap FC2 & Air Cap AC1304	16	3.0	1.9	28	4.5	2.7	38	5.9	3.7	46	7.5	3.7	65	9.7	4.8	20	10	6	7	8	9	
		18	2.3	2.1	30	3.9	2.8	40	5.4	3.4	50	6.5	4.0	70	8.6	5.2	32	20	9	11	12	10	
		20	1.7	2.3	32	3.3	3.0	42	4.9	3.6	52	5.9	4.2	72	8.0	5.6	42	30	10	13	18	11	
		24	1.3	2.5	34	2.8	3.2	44	4.3	3.7	54	5.4	4.3	80	6.4	6.0	54	40	12	15	18	12	
			1.0	2.7	36	2.3	3.4	46	3.8	3.9	56	4.9	4.5	85	5.3	6.5	54	40	12	15	18	12	
								48	3.3	4.1	58	4.3	4.7	90	4.3	7.0	75	60	13	16	19	13	
PF 300	Fluid Cap FC1 & Air Cap AC1304	12	7.0	1.2	22	11.5	1.7	34	12.4	2.2	46	13.7	2.8	65	18.3	3.6	16	10	7	9	12	10	
		14	5.4	1.4	26	8.3	2.0	38	9.8	2.6	50	10.9	3.1	75	12.6	4.5	32	20	9	12	14	11	
		16	4.2	1.6	30	6.0	2.4	42	7.8	3.0	54	8.7	3.5	80	10.6	5.0	46	30	10	13	16	12	
		18	3.3	1.7	32	5.1	2.6	46	5.9	3.3	56	7.8	3.7	85	8.7	5.4	56	40	12	15	19	12	
		20	2.7	2.0	34	4.3	2.8	48	5.0	3.5	60	6.4	4.1	90	6.9	5.9	56	40	12	15	19	12	
		22	2.0	2.2	36	3.6	3.0	50	4.3	3.7	65	4.6	4.5	95	5.5	6.3	85	60	13	16	20	14	
PF 350	Fluid Cap FC1 & Air Cap AC1305	14	4.5	0.8	24	7.5	1.2	34	9.5	1.7	44	11.1	2.2	56	19.8	2.6	16	10	4	5	6	8	
		16	2.9	1.0	26	6.0	1.4	36	7.8	2.0	46	9.7	2.5	60	16.7	3.0	30	20	4	5	7	10	
		18	2.0	1.2	28	4.5	1.7	38	6.5	2.2	48	8.4	2.7	65	13.5	3.5	40	30	5	7	9	11	
		20	0.8	1.4	30	3.4	1.8	40	5.2	2.5	52	5.7	3.3	70	9.7	4.3	40	30	5	7	9	11	
					32	2.4	2.1	42	4.1	2.7	56	3.9	3.8	80	4.8	5.7	52	40	6	8	11	12	
					34	1.3	2.3	46	2.6	3.3	60	2.4	4.4	90	1.8	7.4	70	60	8	10	12	13	
PF 400	Fluid Cap FC5 & Air Cap AC1306	14	7.7	3.2	26	10.5	4.6	34	20.8	4.8	42	29.4	5.2	58	44.7	6.1	14	10	7	8	10	11	
		16	5.0	3.8	28	7.0	5.2	36	16.6	5.3	44	25.1	5.6	60	41.0	6.4	26	20	10	12	16	12	
							38	12.8	5.8	46	20.8	6.1	65	31.4	7.5	38	30	10	12	18	14		
							40	9.5	6.4	48	16.7	6.6	70	22.5	8.8	48	40	12	16	20	15		
							42	6.7	6.9	50	13.1	7.2	75	15.0	10.1	7.8	52	10.1	7.8	14	17	23	16
										52	10.1	8.3	80	8.7	11.5								

Standard Materials: Nickel Plated Brass, 303 Stainless Steel and 316 Stainless Steel.

Spray angle performance varies with pressure. Contact BETE for specific data on critical applications.