
i6

Bold and innovative, i6 represents the strong side of comfort. Its impressive airflow and striking design bring power into focus for your space, transforming the ordinary into the exceptional. Let automated SenseMe™ technology and an available color-changing LED modernize your notion of fan performance, then relax as i6 silently safeguards your comfort.

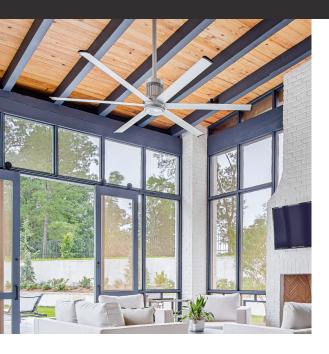

KEY FEATURES

- **Six premium airfoils** built from aircraft-grade aluminum
- Patented brushless DC motor for silent, efficient performance
- **Built-in SenseMe™ technology** for automated convenience and efficiency
- Voice integration with Amazon
 Alexa and Google Assistant devices
- Available light kit with fully dimmable, color-changing LED
- Indoor and outdoor models available to fit any space

DIAMETER-

60, 72, AND 84 INCHES (152, 183, AND 213 CM)

MOUNTING -

– UNIVERSAL – FLUSH MOUNT

- CONTROL -

- BLUETOOH REMOTE - MOBILE APP - VOICE INTEGRATION

- WARRANTY –

UP TO
5 YEARS
INDOOR

UP TO
3 YEARS
OUTDOOR




DISCOVER MORE ABOUT 16

Learn more at **bigassfans.com/i6** or call **877.BIG.FANS** for a free custom quote.


i6

INSPIRED BY INDUSTRY, BUILT FOR COMFORT.





Pictured with 6 in. (152 mm) downrod and light kit



Technical Specifications											
Diameter (A)	Environment	CFM	Efficiency (CFM/W)	Max Watts	Max Speed	Light Kit	Input Power	Weight ¹	Winglet to Ceiling (B)	Light Kit Height	Sound Level ²
60 in. (1.5 m)	Indoor	7,122	248	23.6 W	145 RPM			34 lb	17.4 in.	0.7 in (18 mm)	<35 dba at max speed
	Outdoor (IPX5)	7,105	247	23.8 W				(15.4 kg)	(442 mm)		
72 in. (1.8 m)	Indoor	13,598	312	41.6 W	140 RPM	1,770 lm	100–277 VAC, 50/60 Hz, 1 Ф	35.7 lb	17.1 in.		
	Outdoor (IPX5)	13,860	318	42.2 W		72.6 lm/W		(16.2 kg)	(434 mm)		
84 in. (2.1 m)	Indoor	15,576	370	40.2 W	110 RPM		37.3 lb	16.8 in.			
	Outdoor (IPX5)	15,814	369	41 W				(16.9 kg)	(427 mm)		

Construction Features								
Airfoils	Motor and Hub	Remote	Onboard Sensors	Integrations ³	Mounting⁴	Accessories		
Made from aircraft-grade aluminum Tilted blade profile for optimum airflow spread	24 V DC motor and power supply housed in a three-piece cast aluminum hub with integrated airfoil retention system	"Point-anywhere" pairing Integrated speed indicators Mount fixed to wall or with magnetic holder	Temperature, humidity, and motion sensors	Voice control with Google Assistant or Amazon Alexa Works with home automation systems	Flat or sloped ceilings 8 ft (2.4 m) or taller Maximum slope: 36°	LED Light Kit 0–10 V module Optional downrod lengths available for ceilings over 14 ft (4.3 m)		

Ordering Information									
Diameter	Environment	Mount ⁵	Finish	Downrod ⁵	LED Light	0-10 V			
MK-I61-05: 60 in. (1.5 m) MK-I61-06: 72 in. (1.8 m) MK-I61-07: 84 in. (2.1 m)	18: Indoor 19: Outdoor	00: Flush 06: Standard	A727: Brushed Aluminum A728: Black A729: White A730: Oil-Rubbed Bronze	Blank: Flush 106: 6 in. (152 mm) 112: 12 in. (305 mm) 124: 24 in. (610 mm) 100: 36, 48, 60 in. (914, 1219, 1524 mm)	Blank: No LED Light S2: LED Light	Blank: No 0–10 V V54: 0–10 V			

Weight does not include mount or downrod.

Weight does not include m

Lead times may vary. See full warranty for coverage information.

Finish Options





Oil-Rubbed Bronze





LED Light Kit



Remote



Magnetic Holder





Fixed Wall Mount









USA BIGASSFANS.COM CANADA 844-924-4277 AUSTRALIA BIGASSFANS.COM/AU SINGAPORE 65 6709 8500

MALAYSIA 603 5565 0888